


815 Ultra

Transparent



Flame Retardant

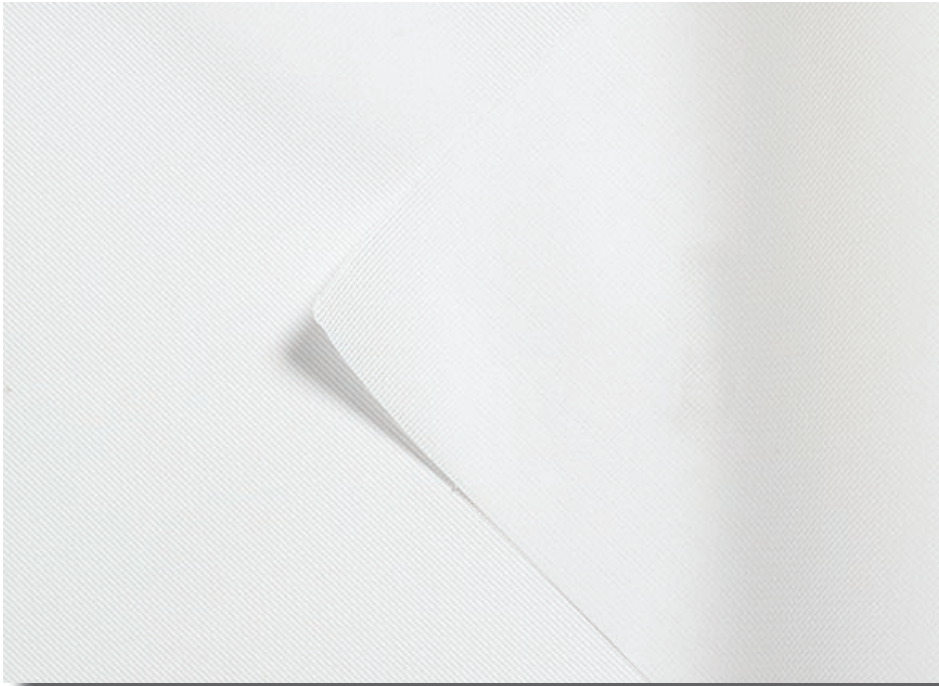

Pleated Blinds



Roller Blinds

Sheer fabric with excellent heat and glare control

Features

- Part of the Verosol Core Collection - fabrics developed in Europe, to the highest quality standard
- Flame retardant fabric, providing subtle shading with good insulation for comfort all year round
- Complements heavier blockout fabrics, making it ideal for use in Verosol Twin Systems
- Suitable for Pleated Blinds and Roller Blinds

Care Instructions

Verosol fabrics are anti-static and therefore dust repellent. For regular maintenance, use a soft feather duster or vacuum-clean with a soft brush in a low setting.

For more information visit verosol.com.au or call **1800 721 404**



Management System
ISO 9001:2008
ISO 14001:2004
www.tuv.com
ID 090032419



green building council australia
MEMBER 2015-2016

815 Ultra

Transparent

Fabric Density	Transparent	Antimicrobial	ASTM-E2149-01
Composition	100% Polyester		
Weight	73gsm ± 5%		
Thickness	0.18mm ± 5%		
Width	2200mm ± 50mm		
Flame Retardancy	DIN 4102 - Classification B1		
Certification	Oeko-Tex 100 Class IV	ISO 9001:2008	ISO 14001:2004
Suitable Products	Roller Blinds	Pleated Blinds	

Fabric colour code	0000
Solar transmittance	61%
Solar reflectance outside	35%
Solar absorptance	4%
Luminous transmittance [VLT]	60%
UV transmittance	37%
Openness factor (nominal)	21%
Ra (colour rendering index)	99


Glazing Type - Single 4mm Clear Glass

Visible light transmittance	57%
G-value / Solar heat gain coefficient	57%
Shading coefficient	66%
U-value (W/m ² K)	2.9

Glazing Type - High Performance Glazing

Visible light transmittance	40%
G-value / Solar heat gain coefficient	26%
Shading coefficient	30%
U-value (W/m ² K)	0.9

Colour Range



0000 White

0105 Natural