

R207.0 Mode Roller Blind

Adjustment of Spring Tension

The counter-balancing spring on all Mode Roller Blinds are pre-tensioned in the Verosol factory, to an optimal setting.

Should additional tension, or even less tension be required, please following the following simple instructions.

- Tension is applied to the counter-balancing spring via a spring winding tension key (supplied with each order of blinds).
- To access the counter-balancing spring, simply slide down the plastic end cap (side cover) to expose the adjustment hole on the control unit;

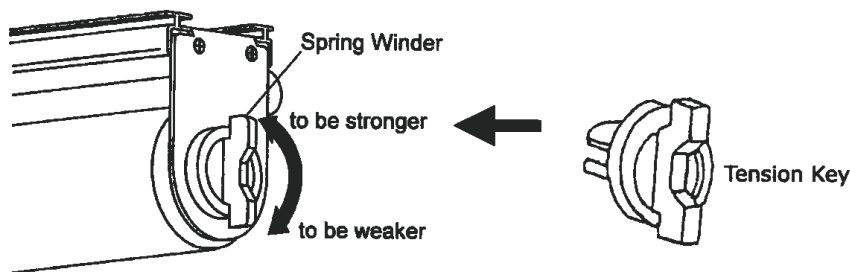


Image: LEFT HAND chain control, with the fabric BACK ROLLED

The following table shows how to adjust the tension:

Control Side [fabric back rolled]	Right Hand Control	Left Hand Control
Direction of pre-winding	Turn Clockwise	Turn Anti-Clockwise
To make raising of fabric lighter	Turn Clockwise	Turn Anti-Clockwise
To make lowering of fabric lighter	Turn Anti-Clockwise	Turn Clockwise