




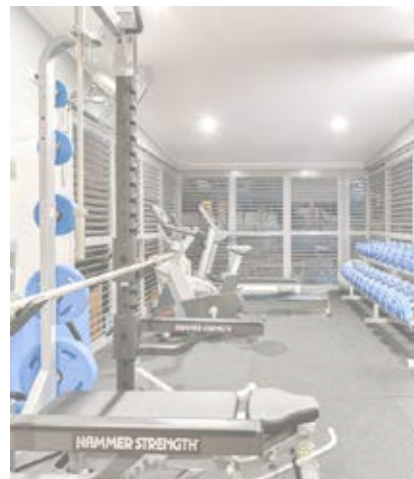

V18.09.18
METRIC

Verosol


WARRANTY & PRODUCT LIMITS



INTERNAL SHUTTER RANGE

PRODUCT	INSTALLATION METHOD	WIDTH			HEIGHT			PANEL BREAKS				
		Min	Max	Max Non Warranty	Min	Max	Max Non Warranty	Mid-Rail(s) Required	Approximate Split Rotation by Blade Size			
PVC								64	89	114		
 <small>AMBIENCE POLYRESIN</small>	Hinged: All Types	200	900	950	400	2700	N/A	1800	1100	1300	N/A	
	Double Hinged	200	400	450	400	2700	N/A	1800	1100	1300	N/A	
	Panel Only	200	900	950	400	2700	N/A	1800	1100	1300	N/A	
	Fixed	200	900	950	400	2700	N/A	1800	1100	1300	N/A	
	Sliding	200	900	950	400	2700	N/A	1800	1100	1300	N/A	
	Multi-Fold	200	550	600	400	2700	N/A	1800	1100	1300	N/A	
PAINTED								64	89	114		
 <small>AMBIENCE HARDWOOD</small>	Hinged: All Types	200	1050	1200	400	3000	N/A	1800, 2700	1100	1300	1200	
	Double Hinged	200	600	700	400	3000	N/A	1800, 2700	1100	1300	1200	
	Panel Only	200	1050	1200	400	3000	N/A	1800, 2700	1100	1300	1200	
	Fixed	200	1050	1200	400	3000	N/A	1800, 2700	1100	1300	1200	
	Sliding	200	1050	1200	400	3000	N/A	1800, 2700	1100	1300	1200	
	Multi-Fold	200	600	700	400	3000	N/A	1800, 2700	1100	1300	1200	
STAINED								64	89	114		
 <small>AMBIENCE HARDWOOD</small>	Hinged: All Types	200	850	900	400	3000	N/A	1800, 2700	1100	1300	1200	
	Double Hinged	200	550	600	400	3000	N/A	1800, 2700	1100	1300	1200	
	Panel Only	200	850	900	400	3000	N/A	1800, 2700	1100	1300	1200	
	Fixed	200	850	900	400	3000	N/A	1800, 2700	1100	1300	1200	
	Sliding	200	850	900	400	3000	N/A	1800, 2700	1100	1300	1200	
	Multi-Fold	200	550	600	400	3000	N/A	1800, 2700	1100	1300	1200	
INTERNAL ALUMINIUM								64	89	114		
 <small>AMBIENCE INTERNAL ALUMINIUM SHUTTER</small>	Hinged: All Types	200	870	1200	400	3000	N/A	1500	N/A	1200	N/A	
	Double Hinged	200	400	600	400	2500	N/A	1500	N/A	1200	N/A	
	Panel Only	200	1100	1200	400	3000	N/A	1500	N/A	1200	N/A	
	Fixed	200	1100	1200	400	3000	N/A	1500	N/A	1200	N/A	
	Sliding	200	1100	1200	400	3000	N/A	1500	N/A	1200	N/A	
	Multi-fold	200	500	600	400	3000	N/A	1500	N/A	1200	N/A	

EXTERNAL SHUTTER RANGE

PRODUCT	INSTALLATION METHOD	WIDTH			HEIGHT			PANEL BREAKS				
		Min	Max	Max Non Warranty	Min	Max	Max Non Warranty	Mid-Rail(s) Required	Approximate Split Rotation by Blade Size			
ALUMINIUM								64	89	114		
	Hinged: All Types	200	870	900	400	3400	N/A	2000, 3000	1000	1200	1200	
	Double Hinged	200	400	450	400	3400	N/A	2000, 3000	1000	1200	1200	
	Panel Only	200	1500	1600	400	3400	N/A	2000, 3000	1000	1200	1200	
	Fixed	200	1500	1600	400	3400	N/A	2000, 3000	1000	1200	1200	
	Sliding	200	1500	1600	400	3400	N/A	2000, 3000	1000	1200	1200	
	Multi-Fold	200	700	750	400	3400	N/A	2000, 3000	1000	1200	1200	

PRODUCT SPECIFIC WARRANTIES

PRODUCT	PAINT	POWDER COAT	STAIN	WOOD GRAIN POWDER COAT	CUSTOM FINISH	STRUCTURAL
 Verosol <small>AMBIENCE POLYRESIN</small>	5 YEARS	N/A	N/A	N/A	N/A	5 YEARS
 Verosol <small>AMBIENCE INTERNAL ALUMINIUM SHUTTER</small>	N/A	10 YEARS	N/A	N/A	5 YEARS	10 YEARS
 Verosol <small>AMBIENCE HARDWOOD</small>	5 YEARS	N/A	2 YEARS	N/A	5 YEARS	15 YEARS
 Verosol <small>AMBIENCE ALUMINIUM</small>	N/A	10 YEARS	N/A	5 YEARS	5 YEARS	10 YEARS

Products in our range that are made from natural timber/wood may show characteristics of their natural source such as grain patterns or blemishes. This gives each shutter its own unique quality and as such are not defects or grounds for warranty.

Each finish used on our products is selected for its durability and quality. There are factors that may impact the application of these paints/stains on our natural products which are not covered under warranty, these include:

- Colour variations that may occur between different manufactured batches of a paint or stain finish.
- Naturally occurring variations in appearance created by artificial or natural lighting.
- Moisture, heat, light, exposure to weather.
- Environmental conditions such as pollutants, acid rain or other corrosive substances, which may impact on finishes or cause corrosion.
- Damage, corrosion, wear, deteriorating or failure of standard components in sea coast applications or such other climates.

Due to the nature of specifications and packaging, items ordered outside of warranty guidelines are not covered for freight damage.