


322 Outlook Mode 5%

Semi Transparent



Flame Retardant

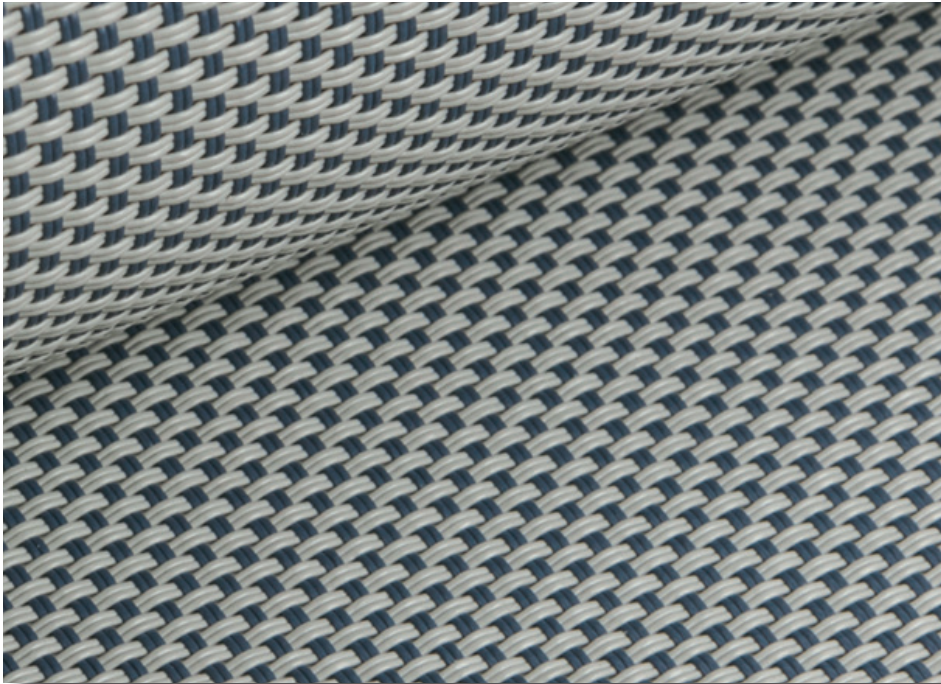

External Roller Blinds

A unique weave providing a functional solar protection with a stylish textured appearance

Features

- Reduces heat transmission
- Reduces glare in direct sunlight, and provides UV protection
- Allows moderate flow of fresh air
- Provides privacy without compromising the view
- Treated with Microban antimicrobial technology to inhibit bacteria, mould & mildew growth

Care Instructions

Keep the fabric clean by brushing regularly both on the top & underside with a soft bristled brush and by hosing occasionally with clear, cold water. Allow the fabric to dry completely before it is rolled up. Do not use powered, high pressure washes to the clean fabric. Do not apply soaps, detergents, cleaning fluids or insecticides.

For more information visit verosol.com.au or call **1800 721 404**



322 Outlook Mode 5%

Semi Transparent

Fabric Density	Semi Transparent		Protection	Microban antimicrobial treated
Composition	28% Polyester / 72% Vinyl Lead Free		Tensile Strength [AS 2001.2.3.1-2001]	Warp: 3225N / 50mm
Weight	540gsm			Weft: 2180N / 50mm
Thickness	0.81mm		Elongation at Break	Warp: 29% / Weft: 26%
Width	3200mm		Wing Rip [AS 2001.2.10-1986]	Warp: 161/N
Construction	2x2 weave, PVC coated polyester mesh			Weft: 119/N
Light Fastness	6-7			
Flame Retardancy tested to [AS/NZS 1530.3-1999]	Ignitability Index	14 Range [0-20]	Complies with BCA General requirements	
	Spread of flame Index	0 Range [0-20]		
	Heat evolved Index	3 Range [0-20]		
	Smoke developed Index	7 Range [0-20]		
Certification	Greenguard Gold	Microban		
Suitable Products	External Roller Blinds			

Fabric colour code	0502	0539	0564	0526	0551	0540	0538	0541	0542	0544	0510	0509	0553	0517	0508	0566	0504	0511	0533	0505
Solar transmittance	11%	8%	5%	4%	2%	6%	7%	5%	5%	3%	8%	6%	1%	11%	10%	4%	1%	9%	4%	2%
Solar reflectance outside	54%	43%	42%	49%	17%	13%	21%	13%	8%	12%	10%	6%	8%	76%	49%	47%	16%	16%	35%	27%
Solar absorbance	35%	49%	53%	47%	81%	81%	72%	82%	87%	85%	82%	89	91%	13%	41%	49%	83%	75%	61%	71%
Luminous transmittance [VLT]	8%	8%	10%	9%	8%	8%	6%	7%	7%	10%	12%	10%	8%	15%	11%	9%	5%	12%	11%	7%
UV transmittance	6%	4%	6%	8%	5%	5%	6%	5%	5%	7%	7%	7%	5%	7%	6%	6%	6%	7%	7%	6%
Openness factor	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%
Shading Co-efficients																				
3mm Glazing	0.16	0.14	0.09	0.06	0.16	0.16	0.16	0.15	0.15	0.12	0.18	0.16	0.11	0.09	0.15	0.08	0.10	0.18	0.10	0.10
6mm Glazing	0.14	0.14	0.09	0.06	0.16	0.15	0.15	0.15	0.15	0.12	0.18	0.16	0.11	0.09	0.15	0.08	0.10	0.18	0.10	0.09

Colour Range

