


323 Outlook Mode Privacy 1%

Non Transparent



Flame Retardant

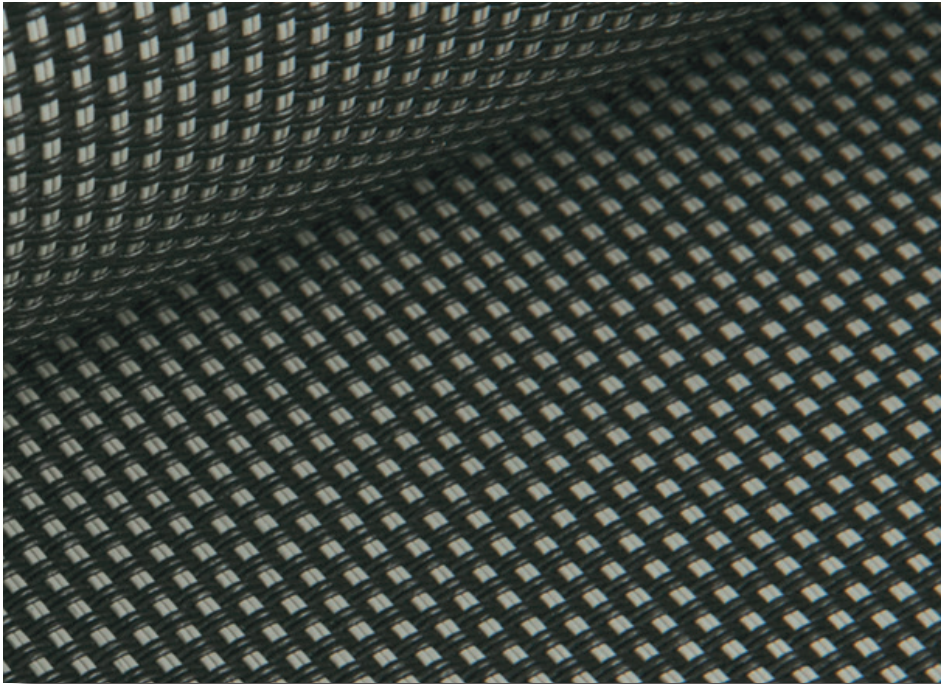

External Roller Blinds

A high density weave that provides exceptional solar protection and visual privacy

Features

- Reduces heat transmission
- Eliminates glare in direct sunlight, and provides UV protection
- Allows moderate flow of fresh air
- Creates visual privacy screening
- Treated with Microban antimicrobial technology to inhibit bacteria, mould & mildew growth

Care Instructions

Keep the fabric clean by brushing regularly both on the top & underside with a soft bristled brush and by hosing occasionally with clear, cold water. Allow the fabric to dry completely before it is rolled up. Do not use powered, high pressure washes to the clean fabric. Do not apply soaps, detergents, cleaning fluids or insecticides.

For more information visit verosol.com.au or call 1800 721 404




323 Outlook Mode Privacy 1%

Non Transparent


Fabric Density	Non Transparent		Protection	Microban antimicrobial treated
Composition	28% Polyester / 72% Vinyl Lead Free		Tensile Strength	Warp: 3772N / 50mm
Weight	650gsm		[AS 2001.2.3.1-2001]	Weft: 1409N / 50mm
Thickness	1.08mm		Elongation at Break	Warp: 32.6% / Weft: 16.1%
Width	3200mm		Wing Rip	Warp: 234/N
Construction	2x2 weave, PVC coated polyester mesh		[AS 2001.2.10-1986]	Weft: 122/N
Light Fastness	6-7			
Flame Retardancy tested to [AS/NZS 1530.3-1999]	Ignitability Index	10 Range [0-20]	Complies with BCA General requirements	
	Spread of flame Index	0 Range [0-20]		
	Heat evolved Index	2 Range [0-20]		
	Smoke developed Index	7 Range [0-20]		
Certification	Greenguard Gold	Microban		
Suitable Products	External Roller Blinds			

Fabric colour code	0400	0401	0402	0403	0404	0407	0408	0409	0411	0412
Solar transmittance	1%	1%	1%	1%	1%	1%	1%	1%	2%	2%
Solar reflectance outside	7%	8%	34%	7%	4%	8%	7%	16%	11%	7%
Solar absorptance	92%	91%	65%	92%	95%	92%	93%	83%	87%	91%
Luminous transmittance [VLT]	2%	1%	1%	1%	1%	1%	1%	2%	2%	2%
UV transmittance	2%	1%	1%	1%	1%	1%	1%	1%	2%	2%
Openness factor	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%
Shading Co-efficients										
3mm Glazing	0.12	0.12	0.09	0.12	0.12	0.11	0.11	0.10	0.12	0.13
6mm Glazing	0.12	0.12	0.09	0.12	0.12	0.11	0.11	0.10	0.12	0.13

Colour Range

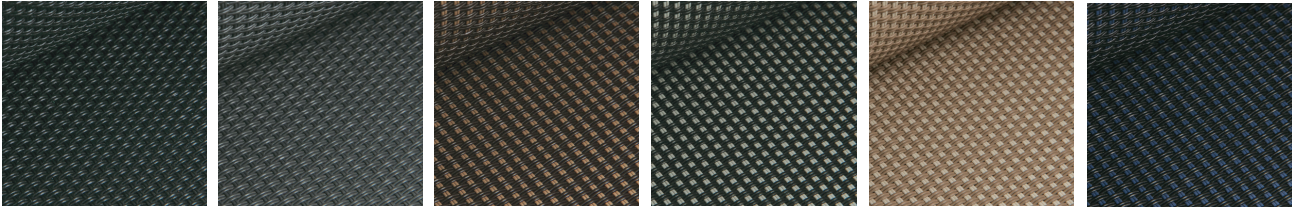

0400 Ebony 0401 Gunmetal 0402 Chestnut 0403 Storm 0404 Paperbark 0407 Black Opal

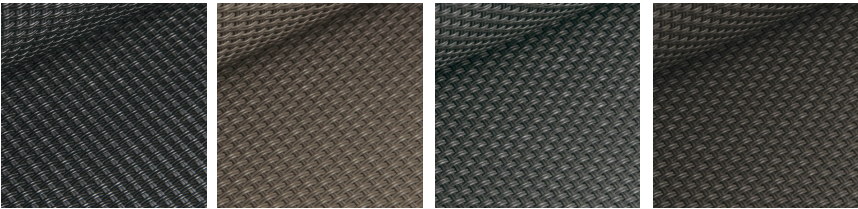

0408 Shadow 0409 Colorado 0411 Basalt 0412 Monument