


## 849 SilverScreen Originals

Semi Transparent Metallised



Flame Retardant

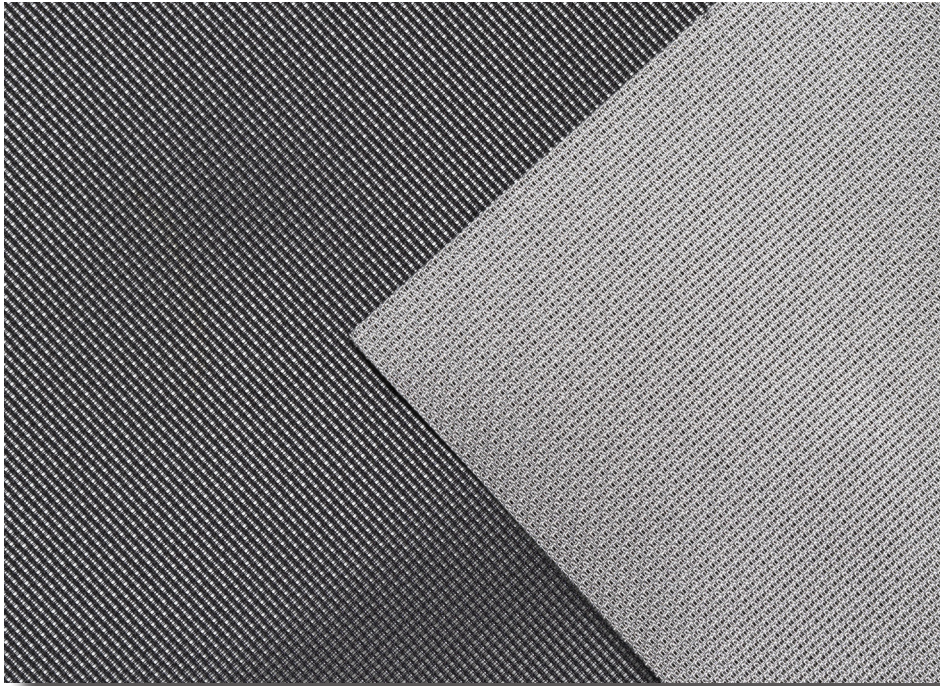

Pleated Blinds



Roller Blinds

*Superior heat and light control available in 4 transparencies*

### Features

- Part of the Verosol Core Collection - metallised fabrics developed in Europe, to the highest quality standard
- Provides vision out and high performance, independent of colour
- Available in matching non metallised fabric range making it the perfect partner for twin blind systems
- Superior heat and glare control, excellent energy efficient solution
- Woven from 100% Polyester Trevira CS and is inherently flame retardant
- Greenguard Gold, Global GreenTagCert™ GreenRate | Level A and Oeko-Tex certified
- The Originals Collection features 13 Core colours and 23 Indent colours, available in 4 different transparencies
- Suitable for Pleated Blinds and Roller Blinds

### Care Instructions

Verosol fabrics are anti-static and therefore dust repellent. For regular maintenance, use a soft feather duster or vacuum-clean with a soft brush in a low setting.

For more information visit [verosol.com.au](https://verosol.com.au) or call **1800 721 404**



# 849 SilverScreen Originals

## Semi Transparent Metallised

Fabric Density	Semi Transparent			Anti-Static		Yes	
Composition	100% Polyester   Trevira CS	PVC free	Phthalate free	Formaldehyde free		Halogen free	Antimicrobial free
Weight	132gsm ± 5%						
Thickness	0.26mm ± 5%						
Width	2400mm ± 50mm						
Colour Fastness	> 5 [ISO 105-BO2] Metal 8						
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	0	Range [0-20]				
	Spread of flame Index	0	Range [0-10]				
	Heat evolved Index	0	Range [0-10]				
	Smoke developed Index	2	Range [0-10]				
[AS/NZS 3837-1998]	Classification Group 1						
[International]	DIN 4102 B1 (D)   BS5867-2 (UK)   NFPA 701 (USA)						
Aluminium Adhesion	ISO 2409 Classification 0			IR Emissivity Metal Side		0.29	
Corrosion Resistance	Metal layer EN ISO 3231						
Certification	Greenguard Gold	GreenRate   Level A		Oeko-Tex 100 Class IV		ISO 9001:2015	
	ISO 14001:2015	REACH		RoHS2		HPD 2.1	
Suitable Products	Roller Blinds		Pleated Blinds				

Fabric colour code	0000	0105	0741	0711	0221	0292	0765	0778	0790	0920	0936	0998	0829
Solar transmittance	6%	6%	6%	5%	6%	6%	5%	5%	5%	5%	5%	5%	4%
Solar reflectance outside	65%	65%	65%	65%	65%	65%	65%	65%	65%	65%	65%	65%	65%
Solar absorptance	29%	29%	29%	30%	29%	29%	30%	30%	30%	30%	30%	30%	31%
Luminous transmittance [VLT]	5%	5%	5%	5%	5%	5%	4%	4%	4%	5%	3%	3%	3%
UV transmittance	4%	5%	5%	5%	5%	5%	3%	4%	4%	5%	3%	3%	3%
Openness factor (nominal)	2%	2%	2%	2%	2%	2%	2%	2%	2%	2%	2%	2%	2%
Ra (colour rendering index)	99	98	98	98	98	98	98	98	98	98	98	98	98

### Glazing Type - Single 4mm Clear Glass

Visible light transmittance	5%
G-value / Solar heat gain coefficient	28%
Shading coefficient	32%
U-value (W/m²K)	2.6

### Glazing Type - High Performance Glazing

Visible light transmittance	3%
G-value / Solar heat gain coefficient	18%
Shading coefficient	21%
U-value (W/m²K)	0.8

### Colour Range

