


203 SilverScreen Performance [Vision]

Semi Transparent Metallised

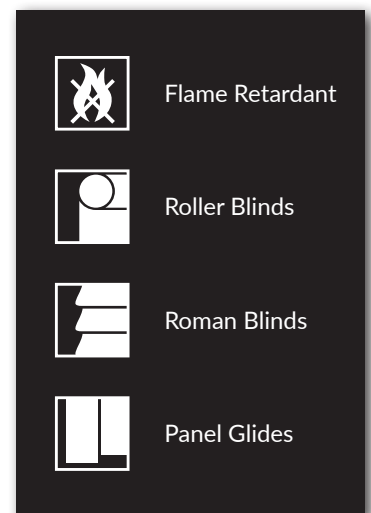

Experience superior heat, glare & UV protection without losing the views

Features

- Part of the Verosol Core Collection - metallised fabrics developed in Europe, to the highest quality standard
- Provides excellent vision out, and dramatically reduces heat and glare at the window independent of colour
- Excellent energy efficient solution, offering an unparalleled solar reflectance of 82%
- Constructed from a hard wearing PVC coated fibreglass yarn and is inherently flame retardant
- Suitable for Roller Blinds, Roman Blinds and Panel Glides

Care Instructions

Verosol fabrics are anti-static and therefore dust repellent. For regular maintenance, use a soft feather duster or vacuum-clean with a soft brush in a low setting.

For more information visit verosol.com.au or call **1800 721 404**



Green Building Council Australia
Member 2023-2024

203 SilverScreen Performance [Vision]

Semi Transparent Metallised

Fabric Density	Semi Transparent		Pattern	2x2 Basket Weave	
Composition	75% PVC / 25% PET	Phthalate Free Formaldehyde Free		Anti-Static	Yes
Weight	440gsm ± 5%		Breaking Strength	Warp 197 daN/5cm	
Thickness	0.55mm ± 5%		Weft 167 daN/5cm		
Width	2800mm ± 50mm				
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	15 Range [0-20]			
	Spread of flame Index	0 Range [0-10]			
	Heat evolved Index	1 Range [0-10]			
	Smoke developed Index	7 Range [0-10]			
[AS/NZS 3837-1998]	Classification Group 1				
[International]	NFPA 701 DIN 4102 B1 BS5867 Part 2 Type B NFP 92503 M2				
Aluminium Adhesion	ISO 2409 Classification 0				
Certifications	GreenGuard Gold	Oeko-Tex Standard 100 Class IV	ISO 9001:2015	ISO 14001:2015	
	HPD 2.1	RoHS2	REACH		

Fabric colour code	0031	0032	0033	0013	0012	0011
Solar transmittance	4%	4%	4%	4%	4%	3%
Solar reflectance outside	82%	82%	82%	82%	82%	82%
Solar absorptance	14%	14%	14%	14%	14%	15%
Luminous transmittance [VLT]	4%	4%	4%	4%	4%	3%
UV transmittance	4%	4%	4%	4%	4%	3%
IR emissivity metal side [low-E]	0.05	0.05	0.05	0.05	0.05	0.05
IR emissivity colour side	0.88	0.88	0.88	0.88	0.88	0.88
Openness factor (nominal)	3%	3%	3%	3%	3%	3%


Glazing Type A - Single 4mm Clear Glass

Visible light transmittance	4%	4%	4%	4%	4%	3%
G-value / Solar heat gain coefficient	17%	17%	17%	17%	17%	17%
Shading coefficient	20%	20%	20%	20%	20%	20%
U-value (W/m²K)	2.01	2.01	2.01	2.01	2.01	2.01

Glazing Type G - Double Solar Control Glazing

Visible light transmittance	3%	3%	3%	3%	3%	3%
G-value / Solar heat gain coefficient	10%	10%	10%	10%	10%	10%
Shading coefficient	29%	29%	29%	29%	29%	29%
U-value (W/m²K)	0.66	0.66	0.66	0.66	0.66	0.66

Colour Range

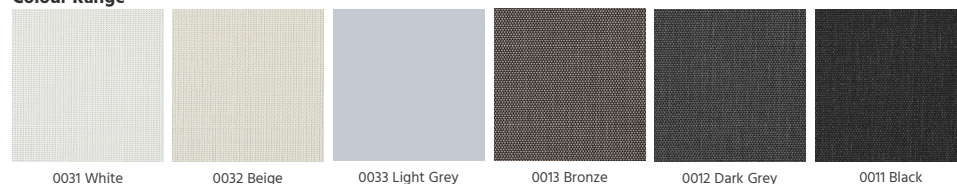

0031 White

0032 Beige

0033 Light Grey

0013 Bronze

0012 Dark Grey

0011 Black