


804 EnviroScreen

Semi Transparent - Coloured Both Sides - Non Metallised



Flame Retardant

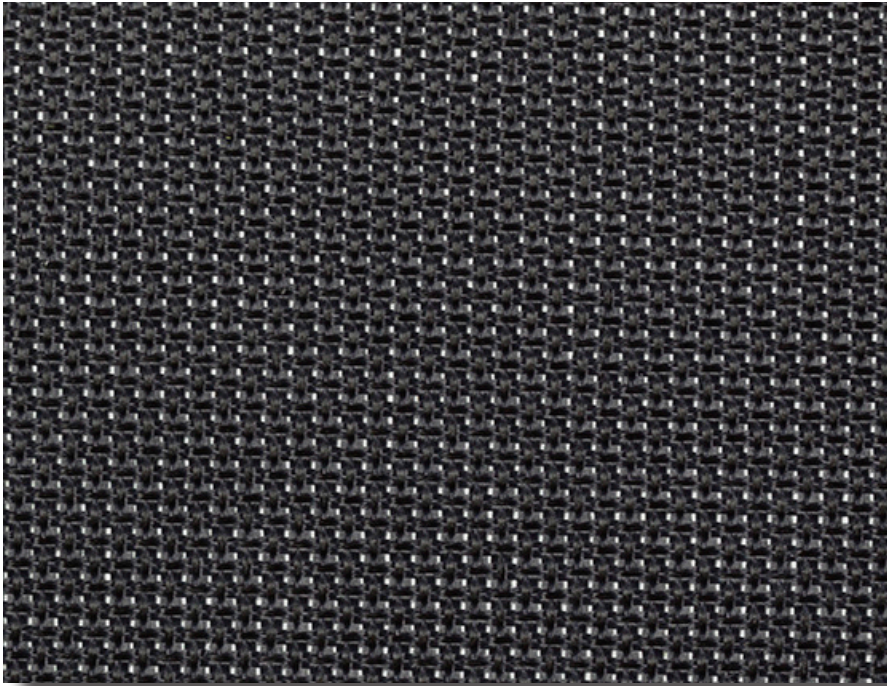

Roller Blinds

Good visual and thermal comfort

Features

- Part of the Verosol Indent Collection - developed in Europe, to the highest quality standard
- Woven screen-like construction, with a clear textile appearance
- PVC free and formaldehyde free; Inherently flame retardant polyester
- Cradle to Cradle Bronze, Greenguard Gold, Global GreenTag EPD, GreenRate Level A, LCARate GOLD & Oeko-Tex certified
- Suitable for Roller Blinds

Care Instructions

For regular maintenance, use a soft feather duster or vacuum-clean with a soft brush in a low setting.

For more information visit verosol.com.au or call 1800 721 404



804 EnviroScreen

Semi Transparent - Coloured Both Sides - Non Metallised

Fabric Density	Semi Transparent					
Composition	100% PES, Inherent FR	PVC free	Phthalate Free	Formaldehyde Free	Halogen Free	Antimicrobial Free
Weight	220gsm ± 5%					
Thickness	0.55mm ± 5%					
Width	2400mm ± 50mm					
Colour Fastness	< 5 [Inside]					
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	0 Range [0-20]				
	Spread of flame Index	0 Range [0-10]				
	Heat evolved Index	0 Range [0-10]				
	Smoke developed Index	1 Range [0-10]				
Certification	Cradle to Cradle Bronze	Greenguard Gold	GreenRate Level A	ISO 9001:2015	ISO 14001:2015	
	Oeko-Tex 100 Class IV	GreenTag EPD	GreenTag LCARate GOLD	REACH	RoHS2	HPD 2.1
Suitable Products	Roller Blinds					

Fabric colour code	0000	0765	0936	0998	0829
Solar transmittance	35%	29%	25%	22%	21%
Solar reflectance outside	53%	44%	38%	30%	21%
Solar absorptance	12%	27%	37%	48%	58%
Luminous transmittance [VLT]	35%	22%	12%	5%	3%
UV transmittance	8%	6%	5%	3%	3%
Openness factor (nominal)	2%	2%	2%	2%	2%

Glazing Type - Single 4mm Clear Glass

Visible light transmittance	35%	21%	1%	4%	3%
G-value / Solar heat gain coefficient	40%	43%	44%	46%	47%
Shading coefficient	46%	49%	51%	53%	54%
U-value (W/m²K)	2,7	2,7	2,7	2,7	2,7

Glazing Type - High Performance Glazing

Visible light transmittance	25%	14%	8%	3%	2%
G-value / Solar heat gain coefficient	22%	23%	24%	24%	25%
Shading coefficient	25%	26%	28%	28%	29%
U-value (W/m²K)	0,9	0,9	0,9	0,9	0,9

Colour Range

