


833 SilverScreen ClearView

Semi Transparent Metallised



Flame Retardant

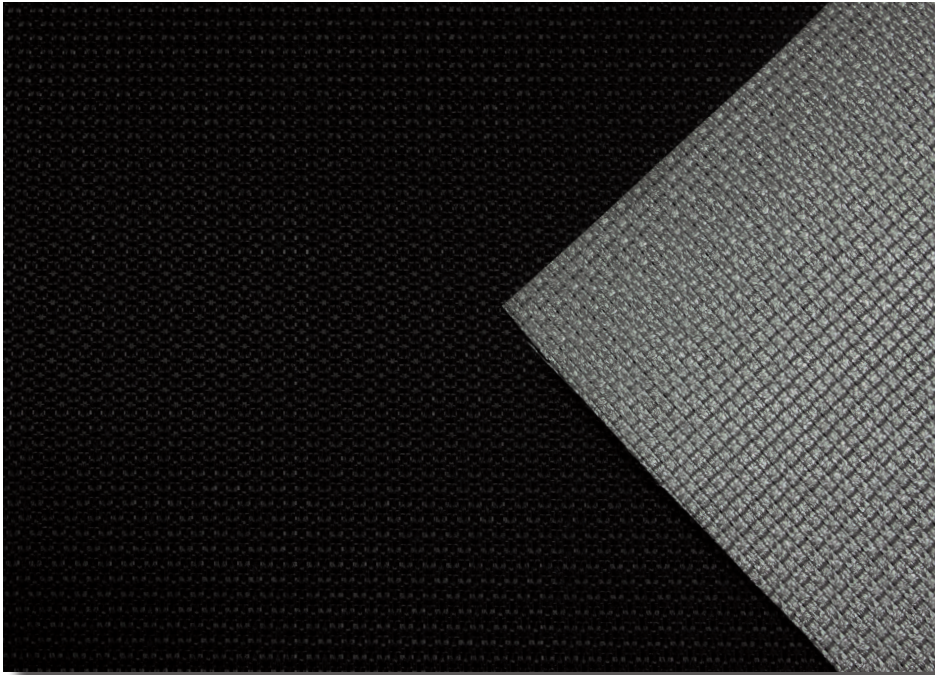

Roller Blinds



Panel Glides

Superior visual and thermal comfort

Features

- Part of the Verosol Core Collection - Metallised fabrics developed in Europe, to the highest quality standard
- Woven screen-like construction, with a clear textile appearance providing a wide viewing angle
- High reflective properties, ClearView is an excellent energy efficient solution
- PVC free, Inherently flame retardant polyester
- Greenguard Gold, Global GreenTagCert™ GreenRate | Level A, GreenTag PHD™, and Oeko-Tex certified
- Suitable for Roller Blinds and Panel Glides

Care Instructions

Verosol fabrics are anti-static and therefore dust repellent. For regular maintenance, use a soft feather duster or vacuum-clean with a soft brush in a low setting.

For more information visit verosol.com.au or call **1800 721 404**



833 SilverScreen ClearView

Semi Transparent Metallised

Fabric Density	Semi Transparent			Anti-Static		Yes	
Composition	100% Polyester	PVC free	Phthalate free	Formaldehyde free		Halogen free	Antimicrobial free
Weight	210gsm ± 5%						
Thickness	0.41mm ± 5%						
Width	2750mm						
Colour Fastness	ISO105-B02; interior: >5; exterior: 8						
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	0 Range [0-20]					
	Spread of flame Index	0 Range [0-10]					
	Heat evolved Index	0 Range [0-10]					
	Smoke developed Index	3 Range [0-10]					
[AS/NZS 3837-1998]	Classification Group	1					
[International Standards]	DIN 4102 B1 (D) BS5867-2 (UK) NFPA 701 (USA)						
Aluminium Adhesion	ISO 2409 Classification 0						
Certification	Greenguard Gold	Oeko-Tex 100 Class IV		ISO 9001:2015		ISO 14001:2015	
	Green Rate Level A	GreenTag PHD tm Platinum Health Rate tm		EPD	HPD 2.1	REACH	RoHS2
Suitable Products	Roller Blinds	Panel Glides					

Fabric colour code	0000	0741	0765	0936	0998	0829
Solar transmittance	4%	4%	4%	4%	3%	3%
Solar reflectance outside	74%	74%	74%	74%	74%	74%
Solar absorptance	22%	22%	22%	22%	23%	23%
Luminous transmittance [VLT]	4%	4%	4%	3%	3%	3%
UV transmittance	4%	4%	3%	3%	3%	3%
IR Emissivity metal side [low-E]	0.21	0.21	0.21	0.21	0.21	0.21
IR Emissivity colour side	0.85	0.85	0.85	0.85	0.85	0.85
Openness factor (nominal)	3%	3%	3%	3%	3%	3%

Glazing Type - Single 4mm Clear Glass

Visible light transmittance	4%	4%	4%	3%	3%	3%
G-value / Solar heat gain coefficient	22%	22%	22%	22%	22%	22%
Shading coefficient	25%	25%	25%	25%	25%	25%
U-value (W/m²K)	2.4	2.4	2.4	2.4	2.4	2.4

Glazing Type - High Performance Glazing

Visible light transmittance	3%	3%	3%	2%	2%	2%
G-value / Solar heat gain coefficient	15%	15%	15%	15%	15%	15%
Shading coefficient	18%	18%	18%	18%	18%	18%
U-value (W/m²K)	0.8	0.8	0.8	0.8	0.8	0.8

Colour Range

