
231 Veroscreen G3

Semi Transparent

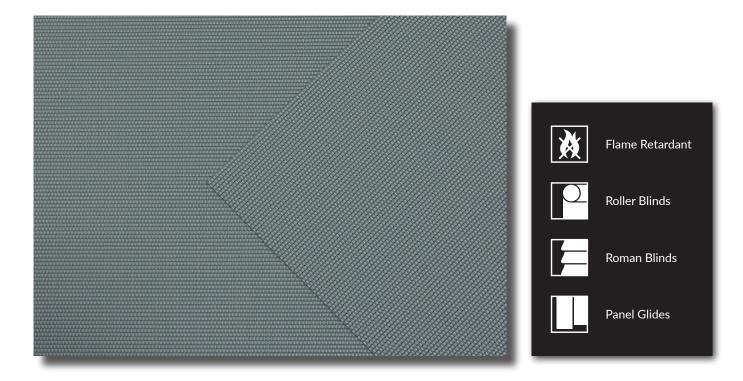

Delicate to touch and offering subtle privacy with matching blockout

Features

- A premium fade resistant and flame retardant fabric
- Constructed from a fine 2x1 weave, making it delicate to touch
- Offering a clean view from the inside of the home and subtle privacy from the outside
- Durable, easy to clean screen fabric, making it ideal for kitchens and bathrooms
- Contemporary palette of 16 colours, and available in matching blockout fabric
- Suitable for Roller Blinds, Roman Blinds and Panel Glides

Care Instructions

Wipe clean with warm soapy water and a damp cloth.

For more information visit verosol.com.au or call 1800 721 404







231 Veroscreen G3

Semi Transparent

Fabric Density	Semi Transparent									
Composition	30% Polyester / 70% PVC	•	Dinamatanal Chalailin	Warp 153 daN / 5cm						
Weight	425gsm ± 5%	• • • • • • • • • • • • • • • • • • • •	· · Dimensional Stability	Weft 184 daN / 5cm						
Thickness	0.63mm ± 5%	•	Dungling Changel	Warp 5.2 daN						
Width	3000mm	•••••	· · Breaking Strength	Weft 4.9 daN						
Colour Fastness	≥ 5 [Blue Wool Scale]	•••••	• • • • • • • • • • • • • • • • • • • •							
Flame Retardancy	Ignitability Index	15 Range [0-20]								
[AS/NZS 1530.3-1999]	Spread of flame Index	0 Range [0-10]								
	Heat evolved Index	1 Range [0-10]	• • • • • • • • • • • • • • • • • • • •							
	Smoke developed Index	7 Range [0-10]	•••••							
Certification	Greenguard Gold	Oeko-Tex 100 Class IV	•••••							
Suitable Products	Roller Blinds	Roman Blinds	Panel Glides							

Fabric colour code	1000	1500	1800	2000	3000	4000	5000	5500	5800	6000	6500	6700	7000	8000	8500	9000
Solar transmittance	24%	21%	22%	22%	21%	15%	10%	8%	10%	15%	14%	12%	7%	9%	10%	7%
Solar reflectance outside	62%	57%	59%	54%	43%	30%	12%	5%	13%	49%	37%	23%	11%	8%	6%	4%
Solar absorptance	14%	22%	19%	24%	36%	55%	78%	87%	77%	36%	49%	65%	82%	83%	84%	89%
Luminous transmittance	20%	16%	18%	17%	15%	11%	9%	8%	8%	11%	11%	8%	7%	8%	9%	7%
UV transmittance	7%	7%	7%	7%	7%	7%	8%	7%	7%	5%	7%	7%	6%	8%	8%	7%
Openness factor	7%	6%	7%	7%	6%	6%	8%	7%	6%	5%	7%	6%	6%	8%	8%	7%

Glazing Type - Single 4mm Clear Glass

G-value / SHGC	38%	41%	40%	43%	49%	56%	66%		65%	45%	52%	59%	66%	68%	69%	70%
Shading coefficient	44%	47%	46%	49%	56%	64%	76%	79%	75%	52%	60%	68%	76%	78%	79%	80%

Glazing Type - High Performance Glazing

•••••																
G-value / SHGC	25%	26%	26%	26%	27%	28%	30%	31%	30%	27%	28%	29%	30%	30%	30%	31%
• • • • • • • • • • • • • • • • • • • •	• • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • •	• • • • • • • •	• • • • • • •	• • • • • • • •	• • • • • • • •		• • • • • • •	• • • • • • • • •
Shading coefficient	29%	30%	30%	30%	31%	32%	34%	36%	34%	31%	32%	33%	34%	34%	34%	36%

Colour Range



© Copyright 2021Verosol Australia [ABN 36 006 221 003]

Updated July 2023
Information supplied was current at time of printing. Please refer to Warranty Terms & Conditions at www.verosol.com.au for more information. All presented data calculated in WIS 3.0.1 (Advanced Windows Information System) with spectral data. Specifications and other data are based on information available at the time of preparation of this document and are subject to production tolerances and/or change without prior notice. Flame retardancy information is sourced from AWTA testing results [AS/NZS 1530.3-1999]. Please note that test results may vary slightly depending on fabric colour. [4mm Single Glass reference glazing A EN 14501], [High Performance Glazing reference glazing D EN 14501] according to EN 14500. Note: All colours are a representative only, please request an A4 sample for accurate colour representation at www.verosol.com.au.