


## 328 Soltis Veozip

Semi Transparent



Flame Retardant

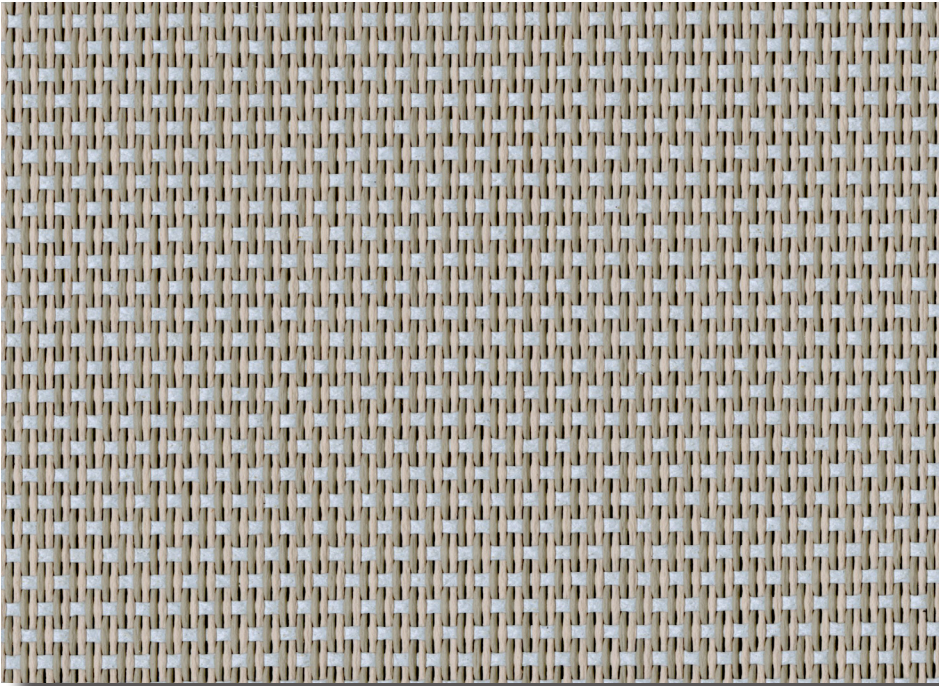

External Roller Blinds

*With unmatched transparency Veozip is the ideal fabric for enjoying your outdoor view*

### Features

- Veozip enables you to make the most of natural light while also benefiting from optimal thermal characteristics
- Reduces glare providing great visual comfort with great outward visibility
- Filters up to 95% of UV radiation
- Perfect integration into ZIP systems providing modern styling to your outdoor living areas

### Care Instructions

Keep the fabric clean by brushing regularly both on the top & underside with a soft brush. Rinse with clean water or wipe with a wet sponge. Allow the fabric to dry completely before it is rolled up. Do not use powered, high pressure washes or steam to clean fabric. Do not apply soaps, abrasive powders, detergents, cleaning fluids or insecticides.

For more information visit [verosol.com.au](https://verosol.com.au) or call **1800 721 404**



# 328 Soltis Veozip

## Semi Transparent

Fabric Density	Semi Transparent		
Composition	25% Polyester / 74% Vinyl / 1% Hemp	Tensile Strength	Warp: 250 daN / 50mm
Weight	600gsm ± 5%	[EN ISO 1421]	Weft: 170 daN / 50mm
Thickness	0.90mm ± 5%	Tear Strength	Warp: 25 daN
Width	3200mm	[DIN 53.363]	Weft: 25 daN
Construction	PVC coated polyester - Precontraint® Technology		
Flame Retardancy tested to [AS/NZS 1530.3-1999]	Ignitability Index	16 Range [0-20]	Complies with BCA General requirements
	Spread of flame Index	0 Range [0-20]	
	Heat evolved Index	1 Range [0-20]	
	Smoke developed Index	6 Range [0-20]	
[International]	M1/NFP 92-507   BS 5867   BS 5867   B1/DIN 4102.1   Method 1/NFPA 701   Class A/ASTM E84		
Certification	Greenguard Gold	ISO 9001	
Suitable Products	External Roller Blinds		

Fabric colour code	51186	51187	51188	51190	51191	51194	51195	51196	51197	51198
Solar transmittance	6%	7%	5%	6%	7%	5%	5%	6%	5%	5%
Solar reflectance outside	37%	37%	29%	27%	18%	7%	7%	10%	8%	5%
Solar absorptance	57%	56%	66%	67%	75%	88%	88%	84%	87%	90%
Luminous transmittance [VLT]	6%	7%	4%	5%	6%	5%	5%	6%	5%	5%
Openness factor	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%
[EN 13363-2*] G-Value [gtot] Glazing Types: C and D										
G-Value [External gtot] Type-C	0.06	0.06	0.05	0.05	0.06	0.06	0.05	0.06	0.05	0.06
G-Value [External gtot] Type-D	0.04	0.04	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04


### EN 13363-2\*

Takes into account the spectral values of glazing transmission and reflection + blind combination for calculating the solar factor gtot.

Type "C" glazing: Low emission, insulating double glazing - face 3 (4 + 16 + 4; argon-filled) g = 0.59 - U = 1.2

Type "D" glazing: Low emission, insulating double glazing - face 2 (4 + 16 + 4; argon-filled) g = 0.32 - U = 1.1

### Colour Range

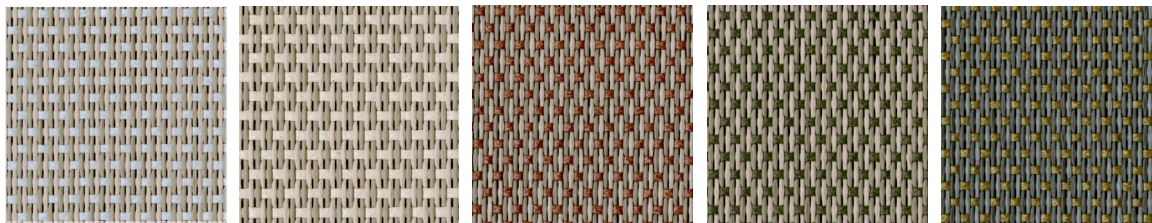


51186 Cumulus

51187 Natural

51188 Macadamia

51190 Tundra

51191 Lunar Surface

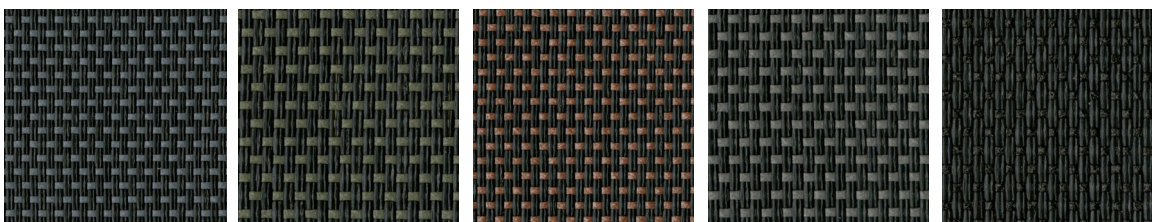

51194 Shadow

51195 Volcano

51196 Sandalwood

51197 Grey Pepper

51198 Graphite Black