# **Invisi-Gard® Sliding Security Door**

### **Product Information**

Invisi-Gard® by Verosol **Sliding Security Door System** combines the strength of Marine Grade 316 Stainless Steel with the beauty, strength and flexibility of aluminium. Invisi-Gard® Security doors offer unparalleled clarity of vision with enhanced secuity.

Using the unique, patented Invisi-Gard® pressure retention and isolation method, you can be assured that the stainless steel mesh will defy the most determined attack from both intruders and corrosion.

Invisi-Gard® uses 316 marine grade stainless steel mesh, a high tensile woven mesh resulting in an exceptionally strong corrosion resistant product that is supported by a lifetime warranty against corrosoion on the stainless steel mesh, and a 15 year warranty on the frame.

Tested and approved in accordance with Australian standards, Invisi-Gard® sliiding security doors will complement any home that requires enhanced levels of security. Invisi-Gard® delivers confidence in Security.

## **Further Information**


To find out more information visit www.verosol.com.au or call Verosol Customer Care on 1800 721 404



## **Technical Information**

Product Name	Invisi-Gard Sliding Security Door				
Product Code	1204.0				
Operation	Sliding security door with tri-lock 3 point rod kit				
Dimensions	Without Midrails	With Midrails			
Width	1200mm	1500mm			
Drop	2400mm	3000mm			
Area	2.8m <sup>2</sup>	4m²			
Mesh	Marine Grade 316 Stainless Steel				
Mesh Count	11 x 11 strands per 25mm²				
Aperture Size	1.6 x 1.6mm				
Velocity Drop	44.21%				
Average Drag Coefficient	0.6998 C <sub>D</sub>				
Wire Tensile Strength	900MPa (Nominal)				
Open Area	44%				
Security Door Frame	Extruded Aluminium with Extreme Grip Protection				
Material	6063-T5 Architectural Aluminium				
Dimensions	52.5mm W x 19mm H				
Colours	Powdercoat: Pearl White Gloss, Surf Mist, Primrose Gloss, APO Grey Satin, Woodland Grey Matt, Monument Matt, Hammersley Brown Satin, AZ Custom Black				
Door Lock	Sliding security lock				
System	Tri-lock 3 point rod kit				
Cylinder	62mm lazy cam cyclinder 2 x 5 pin euro BC				
Colours	Black, White, Primrose				

# Optional extras



ST17	Single Track 24mm Head				
Colours	Custom Powdercoat				
ST18 Track	Single Track 24mm Sill				
Colours	Custom Powdercoat				
ST19 Track	Single Track 24mm Jamb				
Colours	Custom Powdercoat				
ST8 Track	Top/Bottom Sliding Track				
Colours	Pearl White Gloss, Primrose Gloss, Paperbark Matt, Clear Anodised, Az Custom Black				
ST11 Track	PIP Track				
Colours	Pearl White Gloss, Primrose Gloss, Stone Beige Matt, White Birch Gloss, Clear Anodised, Woodland Grey Matt				
ST9	Receiver Channel				
Colours	Bronze Anodised, Clear Anodised, Az Custom Black, Monument Matt				


# System Diagram

Invisi-Gard Sliding Security Door



Invisi-Gard® Unique EGP pressure retention and isolation method.

The Pressure Retention Method completely isolates the Stainless Steel from the Aluminium and because it does not rely on screws, or any other form of mechanical fixing, corrosion through dissimilar metals contact is avoided

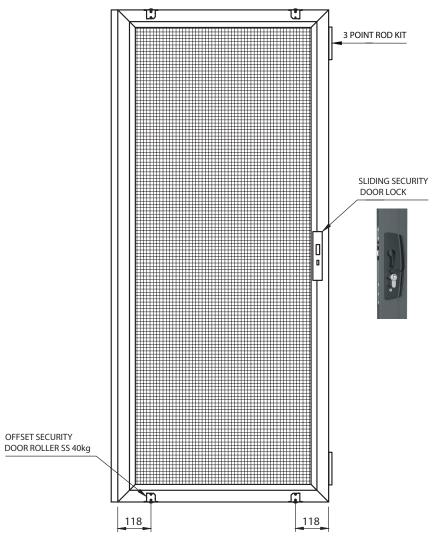

Certifications and Standards	Security	Dynamic Impact Test	Test No: 2012042-3	AS5039/5041-2008
	Security	Jemmy Test	Test No: 2012042-3	AS5039/5041-2008
	Knife Shear Test	Knife Shear Test on Invisi Mesh	Test No: AZT0531.18	AS5039-2008
	Bushfire Test	BAL40 Rating for Invisi-Gard	Test No: EP1210317	AS1530.8.1
	Fire Attenuation	Achieves a fire attenuation rating of up to 55% at 40kW/m2 incident energy	Test No: 52577300a	AS1530.4-2014 appendix B7
	Corrosion	Corrosion Test - 2,000 hours salt spray test with no sign of corrosion	Test No: AZT0139	AS2331.3.1