


## 883 SilverScreen Originals *SilverScreen Living*

Transparent Metallised Curtain Fabric

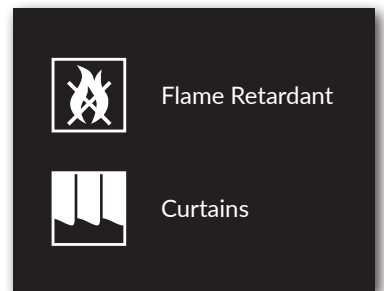

*Metallised curtain fabric for superior heat and light control*

### Features

- Part of the Verosol SilverScreen Living Collection - metallised fabrics developed in Europe, to the highest quality standard
- Provides excellent view through and superior heat and glare control, independent of colour
- Woven from 100% Polyester Trevira CS and is inherently flame retardant, making it ideal for both residential and commercial applications
- Greenguard Gold and Oeko-Tex certified
- Available in Transparent and semi transparent in a selection of 11 core colours

### Care Instructions



For more information visit [verosol.com.au](https://verosol.com.au) or call 1800 721 404



# 883 SilverScreen Originals

## Transparent Metallised Curtain Fabric

Fabric Density	Transparent			Anti-Static	Yes
Composition	100% Polyester   Trevira CS	PVC free	Formaldehyde free	Phthalate Free	Halogen free    Antimicrobials free
Weight	160gsm ± 5%			Dimensional Stability	Warp F break > = 70daN / 5cm with elongation to break point <40%
Thickness	0.41mm ± 5%				
Width	2700mm			Breaking Strength	Weft F break > = 110daN / 5cm with elongation to break point <50%
Colour Fastness	Exterior 8 [ISO 105-B02]				
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	0	Range [0-20]		
	Spread of flame Index	0	Range [0-10]		
	Heat evolved Index	0	Range [0-10]		
	Smoke developed Index	2	Range [0-10]		
[AS/NZS 3837-1998]	Classification Group 1				
[International]	DIN 4102 B1 (D)   BS5867-2 (UK)   NFPA 701 (USA)				
Aluminium Adhesion	ISO 2409 Classification 0				
Certification	Greenguard Gold	Oeko-Tex 100 Class IV	ISO 9001:2015	ISO 14001:2015	
	REACH	RoHS2			
Suitable Products	Curtains				

<b>Fabric colour code</b>	<b>0000</b>
Solar transmittance	20%
Solar reflectance outside	44%
Solar absorptance	36%
Luminous transmittance [VLT]	20%
UV transmittance	19%
Openness factor (nominal)	16%
Ra (colour rendering index)	99

### Glazing Type - Single 4mm Clear Glass

Visible light transmittance	19%
G-value / Solar heat gain coefficient	41%
Shading coefficient	47%
U-value (W/m²K)	2.6

### Glazing Type - High Performance Glazing

Visible light transmittance	14%
G-value / Solar heat gain coefficient	23%
Shading coefficient	26%
U-value (W/m²K)	0.9

### Core Colour Range

