


## 268 Vital Block

Blockout



Flame Retardant

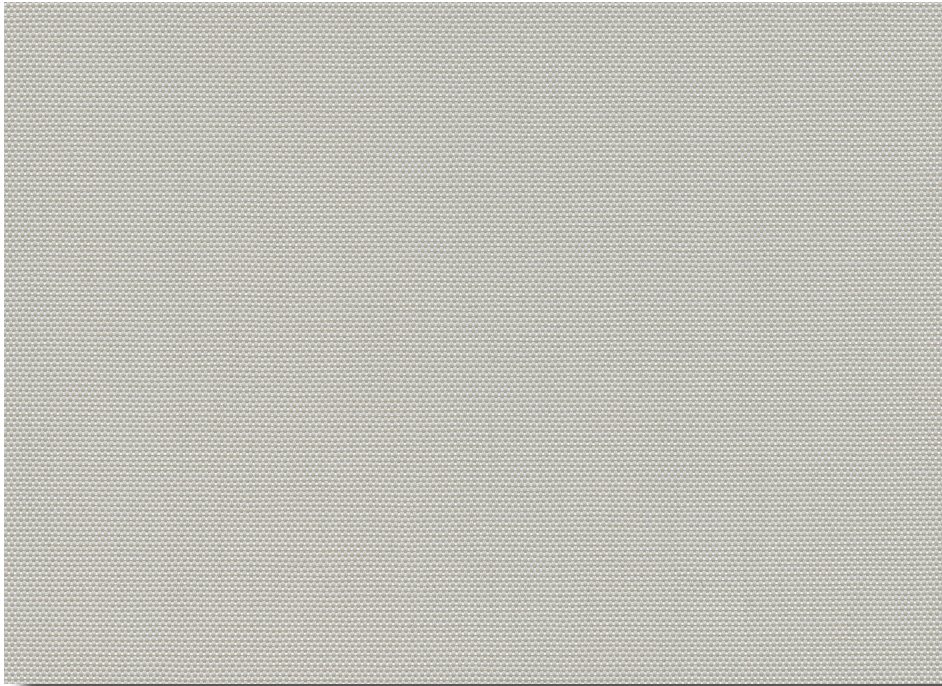

Roller Blinds



Panel Glides

*Sanitized® durable water resistant blackout fabric*

### Features

- Designed for longevity, Vital Block withstands the rigours of constant use without compromising on quality, making it the perfect choice for interiors where durability meets design
- Suitable for both residential & commercial applications, Vital Block's durable surface ensures effortless cleaning
- Vital Block actively repels water & withstands moisture, making it ideal for environments prone to high humidity & water splashes, such as the gym, the pool, or even in a home kitchen or bathroom
- Vital Block is treated with Sanitized® protection which inhibits the growth of bacteria, mould and mildew
- Suitable for Roller Blinds, and Panel Glides

### Care Instructions

For regular maintenance, to remove dust use a soft feather duster or vacuum-clean with a soft brush in a low setting. Spot clean with clean white pencil eraser or gently wipe with warm soapy water and damp sponge. If wet, leave blind down to dry completely. Avoid solvents, Chemicals will permanently damage your fabric.

or more information visit [verosol.com.au](https://verosol.com.au) or call 1800 721 404



Green Building  
Council Australia  
Member 2024-2025

# 268 Vital Block

## Blockout

Fabric Density	Blockout	Pattern	Screen-like appearance
Composition	25% Polyester / 75% PVC		
Antimicrobial	Tested to ASTM G21 & ASTM E2180	Sanitized® Protection	
Opacity	Blockout tested to AS-2663-1999		
Weight	575gsm ± 5%		
Thickness	0.69mm ± 5%		
Width	3000mm		
Colour Fastness	8 [Blue Wool Scale]		
Flame Retardancy, Tested to: [AS/NZS 1530.3-1999]	Ignitability Index	16	Range [0-20]
	Spread of flame Index	0	Range [0-10]
	Heat evolved Index	2	Range [0-10]
	Smoke developed Index	7	Range [0-10]
	Complies with Building Code of Australia requirements for Class 2 to 9 Buildings		
[AS/NZS 1530.2-1993]	Flammability Index	4	
Suitable Products	Roller Blinds	Panel Glides	

Blockout Fabric Range	1000	3000	4000	5000	7000	8000	9000	9500
Solar transmittance	0%	0%	0%	0%	0%	0%	0%	0%
Solar reflectance outside	65%	58%	50%	61%	27%	9%	5%	3%
Solar absorptance	35%	42%	50%	39%	73%	91%	95%	97%
Luminous reflectance [VLR]	73%	61	54%	65%	30%	10%	5%	4%
Luminous transmittance [VLT]	0%	0%	0%	0%	0%	0%	0%	0%
UV transmittance	0%	0%	0%	0%	0%	0%	0%	0%
Openness factor	0%	0%	0%	0%	0%	0%	0%	0%

### Colour Range

