
231 Veroscreen G3

Semi Transparent

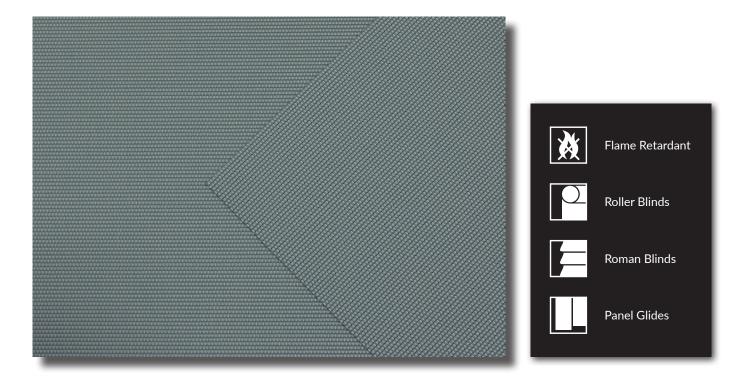

Delicate to touch and offering subtle privacy with matching blockout

Features

- A premium fade resistant and flame retardant fabric
- Constructed from a fine 2x1 weave, making it delicate to touch
- Offering a clean view from the inside of the home and subtle privacy from the outside
- Durable, easy to clean screen fabric, making it ideal for kitchens and bathrooms
- Contemporary palette of 10 colours, and available in matching blockout fabric
- Suitable for Roller Blinds, Roman Blinds and Panel Glides

Care Instructions

Wipe clean with warm soapy water and a damp cloth.

For more information visit verosol.com.au or call 1800 721 404







231 Veroscreen G3

Semi Transparent

Fabric Density	Semi Transparent			
Composition	30% Polyester / 70% PVC	•	Dimensional Chalcille.	Warp 153 daN / 5cm
Weight	425gsm ± 5%	• • • • • • • • • • • • • • • • • • • •	· · Dimensional Stability	Weft 184 daN / 5cm
Thickness	0.63mm ± 5%	•	Dungling Changel	Warp 5.2 daN
Width	3000mm	•••••	· · Breaking Strength	Weft 4.9 daN
Colour Fastness	≥ 5 [Blue Wool Scale]	•••••	• • • • • • • • • • • • • • • • • • • •	
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	15 Range [0-20]		
	Spread of flame Index	0 Range [0-10]		
	Heat evolved Index	1 Range [0-10]	• • • • • • • • • • • • • • • • • • • •	
	Smoke developed Index	7 Range [0-10]	• • • • • • • • • • • • • • • • • • • •	
Certification	Greenguard Gold	Oeko-Tex 100 Class IV	•••••	
Suitable Products	Roller Blinds	Roman Blinds	Panel Glides	

Fabric colour code	1000	1800	2000	4000	6000	6500	7000	8000	8500	9000
Solar transmittance	24%	22%	22%	15%	15%	14%	7%	9%		7%
Solar reflectance outside	62%	59%	54%	30%	49%	37%	11%	8%	6%	4%
Solar absorptance			24%				82%			
Luminous transmittance	20%	18%	17%	11%	11%	11%	7%	8%	9%	7%
UV transmittance	7%	7%	7%	7%	5%	7%	6%	8%	8%	7%
Openness factor		7%	7%	6%	5%	7%	6%	8%	8%	7%


Glazing Type - Single 4mm Clear Glass


G-value / SHGC	38%	40%	43%	56%	45%	52%	66%		69%	70%
Shading coefficient	44%	46%	49%	64%	52%	60%	76%	78%	79%	80%

Glazing Type - High Performance Glazing

• • • • • • • • • • • • • • • • • • • •		• • • • • • • •		• • • • • • • •			• • • • • • • •			• • • • • • • • • • • • • • • • • • • •
G-value / SHGC	25%	26%	26%	28%	27%	28%	30%	30%	30%	31%
• • • • • • • • • • • • • • • • • • • •	• • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • • •		• • • • • • • •	• • • • • • • • • • • • • • • • • • • •
Shading coefficient	29%	30%	30%	32%	31%	32%	34%	34%	34%	36%

Colour Range





9000 Black