

Basics Wand Motor Roller Blind

Basics RF Motor Roller Blind

Product Information

Verosol's Basics range delivers the benefits of motorisation without the complexity. Easily upgrade your existing Ambience chain operated roller blind. Enjoy essential functionality at an affordable price point.

Verosol Basics provides essential blind control with simple up, down, & stop functionality making it perfect for all ages & abilities. Basics provides essential technology with built-in features like battery check, speed control, & favourite positioning.

The battery drive has 1.1Nm torque, and is available in RF (radio frequency) with 5CH remote operation, or as a Wand Drive with either a 600mm, 900mm or 1200mm white control wand that is magnetically attached to the drive unit. The wand is also transferrable across blinds.

This is a retro-fittable solution that can be used with Verosol's single or twin chain operated Ambience roller blind systems.

The Basics Wand Motor & RF Motor is suitable for residential use.



Basics Wand Motor illustrated

^ for illustration purposes Only



Basics Wand Motor & Wands (600mm/900mm/1200mm)



Basics RF Motor & 5CH Remote

Further Information


To find out more information phone Verosol Customer Care on 1800 721 404 or visit www.verosol.com.au

Technical Information

Product Code	R221.1	R222.1	
Product Name	Basics Wand Motor		Basics RF Motor
Retro-Fit Option	Suitable for retrofitting into existing Single or Twin chain operated roller Ambience roller blinds without the need for change to deductions or making adjustments to sizes		
Operation	5V Battery 1.1Nm	Wand Operation - Basics Wand Motor	
Dimensions	Width	600mm minimum upto 30000mm maximum*	
	Drop	500mm minimum upto 3000mm maximum*	
		*Some restrictions apply to minimum & maximums - available sizes based on fabric weights	
	Maximum Area	*Maximum 6m ² is weight based - Maximum total Weight: 5kg	
Roller Tube	Light - 43mm	Standard - 44mm	Heavy Duty - 49mm
	Optimised for operation based on fabric weight and width of blind to reduce tube deflection		
Base Rail Options	D30 Silent [14mm x 31mm], Flat [11mm x 22mm], Round [22mm], Verosol [17mm x 28mm], Elliptical [11mm x 22mm]		
	Colours	Paint: White, Black, Sandstone, Anodised: Clear [Colour availability dependant on rail type]	
Control	Wand Drive Unit	Voltage: 5V DC Torque: 1.1Nm Max Run Time: 6 minutes Speed: 28 RPM (adjustable to 20 or 24) IP Rating: IP20 Temp Working Range: (0° C to 60° C) Insulation Class: III Limit Switch Type: Electronic Current: 0.80 A Battery Size/Type: 2600mAH Sound Level: 56dBA - testing under ISO3745 Power: 9.6W	
	Colours	White	
Brackets	Material	Press formed steel, pre-treated and powder coated	
	Colours	White	


Basics Wand Motor | Basics RF Motor Roller Blind

Basics Range - Wand Operation | RF Motor with 5CH Remote Control

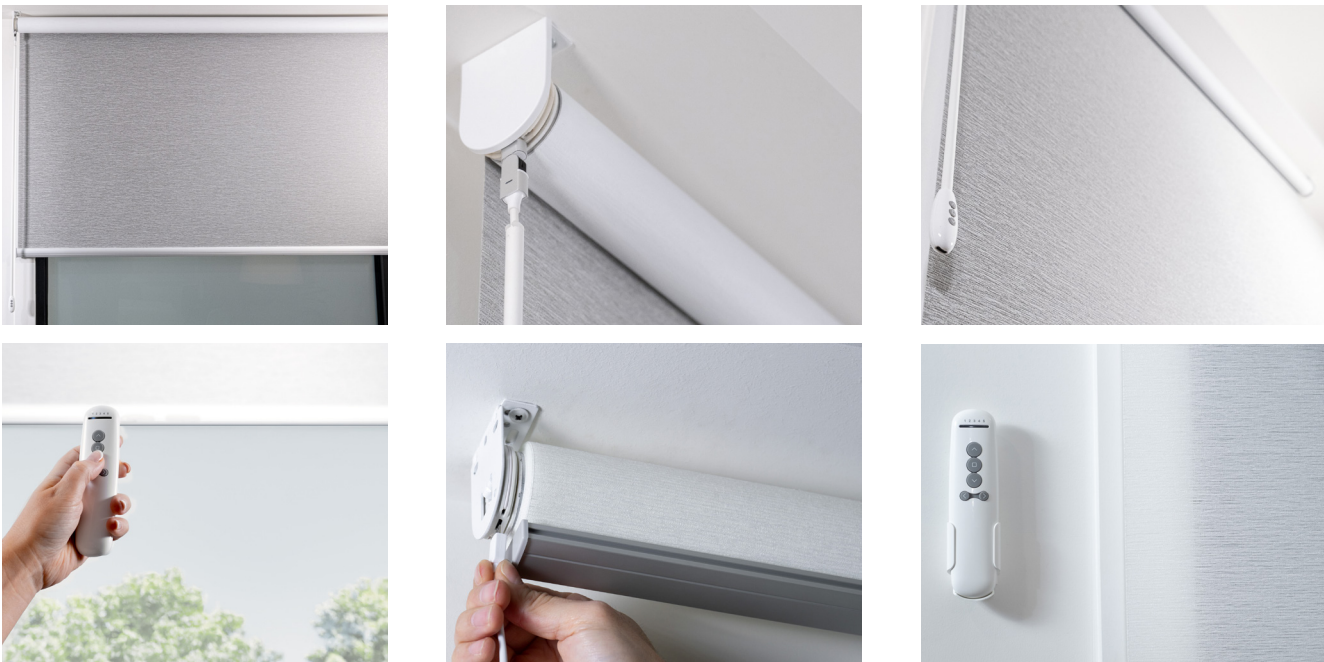

Options	Wall Charger	5V USB WALL CHARGER PLUG 2A FOR 5V MOTORS
	USB-C Cable	AUTOMATE USB CABLE TYPE C 5V - 4000MM
	Wands	BASICS WAND CONTROL - WANDS 600mm 900mm 1200mm (White Only)
	5CH Remote	BASICS 5CH REMOTE CONTROL (White Only)

Diagram - WAND OPERATION

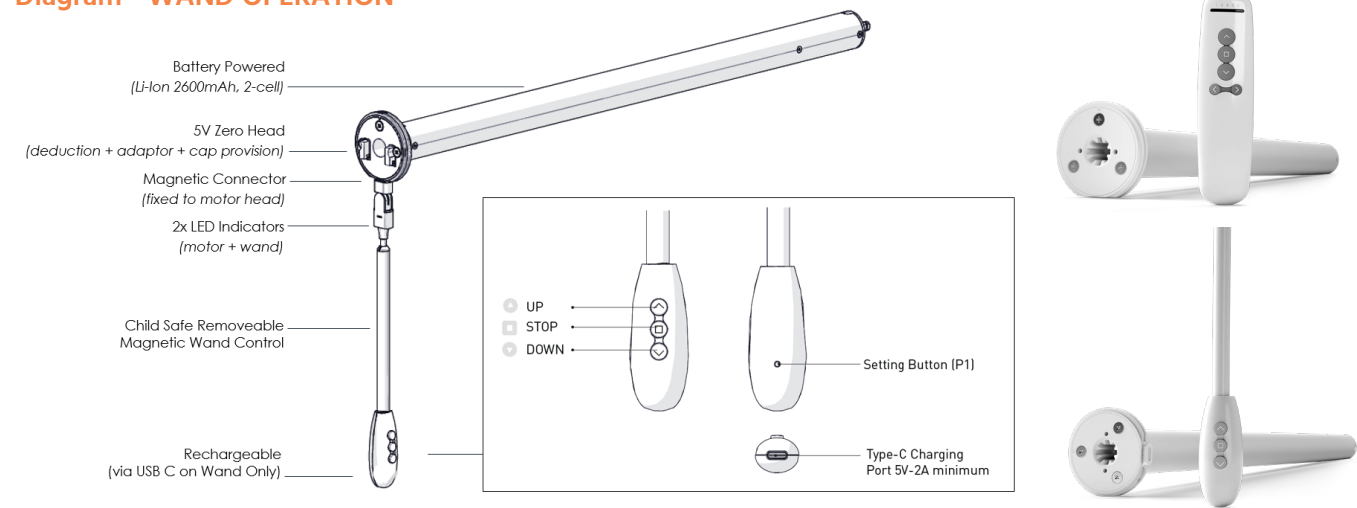

Features

- **SIMPLE, INTUITIVE OPERATION**
- **ZERO HEAD** - The slim motor head retains manual system deductions, eliminating the need for bracket adjustment
- **CHILD-SAFE MAGNETIC WAND or REMOTE CONTROL** - Wand is magnetically held in place or detached
- **5 CHANNEL RF REMOTE CONTROL** - Remote Control Operation available with RF Motor
- **EASY CHARGING** - Accessible USB C port on base of wand provides convenient charging access
- **MINIMAL USER EFFORT** - Compared to a chain drive system, operation is as simple as a press of a button