


812 SilverScreen Originals

Semi Transparent Metallised

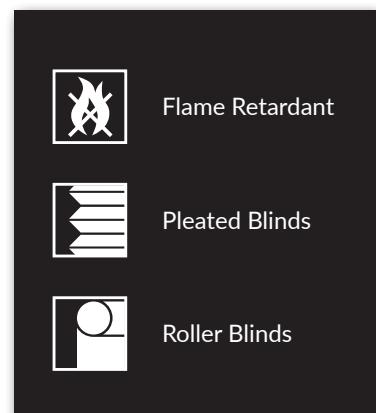

Superior heat and light control available in 4 transparencies


Features

- Part of the Verosol Core Collection - metallised fabrics developed in Europe, to the highest quality standard
- Provides excellent vision out and high performance, independent of colour
- Superior heat and glare control, excellent energy efficient solution
- Woven from 100% Polyester Trevira CS and is inherently flame retardant
- Greenguard Gold, Global GreenTagCert™ GreenRate | Level A and Oeko-Tex certified
- The Originals Collection features 10 Core colours, available in 4 different transparencies
- Suitable for Pleated Blinds and Roller Blinds

Care Instructions

Verosol fabrics are anti-static and therefore dust repellent. For regular maintenance, use a soft feather duster or vacuum-clean with a soft brush in a low setting.

For more information visit verosol.com.au or call **1800 721 404**



Green Building
Council Australia
Member 2025-2026

812 SilverScreen Originals

Semi Transparent Metallised

Fabric Density	Semi Transparent				Anti-Static		Yes			
Composition	100% Polyester Trevira CS		PVC free	Phthalate free	Formaldehyde free		Halogen free	Antimicrobial free		
Weight	95gsm ± 5%									
Thickness	0.20mm ± 5%									
Width	2400mm ± 50mm									
Colour Fastness	> 5 [ISO 105-BO2] Metal 8									
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index 0 Range [0-20]		Spread of flame Index 0 Range [0-10]		Heat evolved Index 0 Range [0-10]		Smoke developed Index 2 Range [0-10]			
[AS/NZS 3837-1998]	Classification Group 1									
[International]	DIN 4102 B1 (D) BS5867-2 (UK) NFPA 701 (USA)									
Aluminium Adhesion	ISO 2409 Classification 0		IR Emissivity Metal Side 0.51							
Corrosion Resistance	Metal layer EN ISO 3231									
Certification	Greenguard Gold		GreenRate Level A		Oeko-Tex 100 Class IV		ISO 9001:2015			
	ISO 14001:2015		REACH		RoHS2		HPD 2.1			
Suitable Products	Roller Blinds		Pleated Blinds							
Fabric colour code	0000	0741	0711	0765	0778	0790	0920	0936	0998	0829
Solar transmittance	9%	9%	9%	8%	9%	8%	8%	8%	8%	8%
Solar reflectance outside	62%	62%	62%	62%	62%	62%	62%	62%	62%	62%
Solar absorptance	29%	29%	29%	30%	29%	30%	30%	30%	30%	30%
Luminous transmittance [VLT]	9%	9%	9%	8%	8%	8%	6%	8%	7%	7%
UV transmittance	7%	9%	7%	8%	7%	8%	6%	7%	7%	7%
Openness factor (nominal)	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%
Ra (colour rendering index)	99	98	98	98	96	97	98	97	98	98

Glazing Type - Single 4mm Clear Glass

Visible light transmittance	9%	Pleat Retention		AWTA test - 100% head applied to 30 pleats: Retention 10 pleats	
G-value / Solar heat gain coefficient	29%	Water Vapour Test % loss aluminium			
Shading coefficient	33%	- After 30 Minutes = 0%			
U-value (W/m ² K)	2.2	- After 2 Hours = 50%			
Glazing Type - High Performance Glazing		Aluminium Retention		Sulphur Dioxide Test % loss aluminium	
Visible light transmittance	7%	- After 3 Hours = 0%			
G-value / Solar heat gain coefficient	18%	- After 5 Hours = 40%			
Shading coefficient	21%	Noise Reduction		ASTM test C423-84a; Coefficient of 0.35 sabin/sq.ft	
U-value (W/m ² K)	0.8				

Colour Range

