


231 Veroscreen G3

Semi Transparent



Flame Retardant

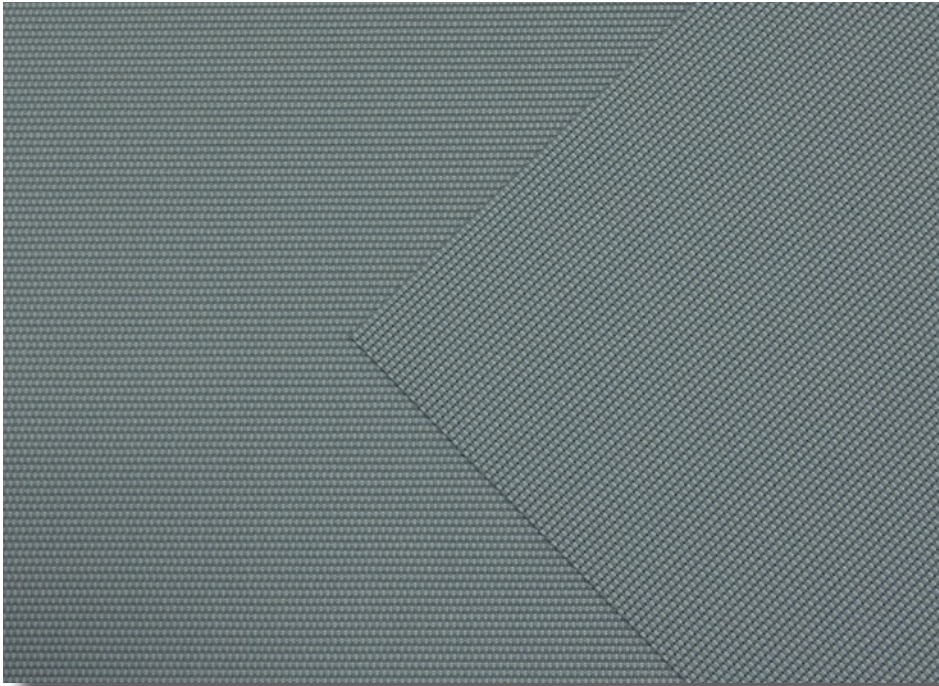

Roller Blinds



Roman Blinds



Panel Glides

Delicate to touch and offering subtle privacy with matching blackout

Features

- A premium fade resistant and flame retardant fabric
- Constructed from a fine 2x1 weave, making it delicate to touch
- Offering a clean view from the inside of the home and subtle privacy from the outside
- Durable, easy to clean fabric with mould and mildew protection, making it ideal for kitchens and bathrooms
- Contemporary palette of 16 colours, and available in matching blackout fabric
- Suitable for Roller Blinds, Roman Blinds and Panel Glides

Care Instructions

Wipe clean with warm soapy water and a damp cloth.

For more information visit verosol.com.au or call **1800 721 404**



green building council australia
MEMBER 2015-2016

231 Veroscreen G3

Semi Transparent

Fabric Density	Semi Transparent		Anti-Static	Yes
Composition	30% Polyester / 70% PVC		Dimensional Stability	Warp 153 daN / 5cm
Weight	425gsm ± 10%			Weft 184 daN / 5cm
Thickness	0.63mm ± 10%		Breaking Strength	Warp 5.2 daN
Width	3000mm			Weft 4.9 daN
Colour Fastness	8 [Blue Wool Scale], Fully Fade Resistant		Protection	Mould and Mildew
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	0	Range [0-20]	
	Spread of flame Index	0	Range [0-10]	
	Heat evolved Index	0	Range [0-10]	
	Smoke developed Index	5	Range [0-10]	
Certification	Oeko-Tex 100 Class IV	Ecospecifier Verified		
Suitable Products	Roller Blinds	Roman Blinds	Panel Glides	

Fabric colour code	1000	1500	1800	2000	3000	4000	5000	5500	5800	6000	6500	6700	7000	8000	8500	9000
Solar transmittance	24%	21%	22%	22%	21%	15%	10%	8%	10%	15%	14%	12%	7%	9%	10%	7%
Solar reflectance outside	62%	57%	59%	54%	43%	30%	12%	5%	13%	49%	37%	23%	11%	8%	6%	4%
Solar absorbance	14%	22%	19%	24%	36%	55%	78%	87%	77%	36%	49%	65%	82%	83%	84%	89%
Luminous transmittance	20%	16%	18%	17%	15%	11%	9%	8%	8%	11%	11%	8%	7%	8%	9%	7%
UV transmittance	7%	7%	7%	7%	7%	7%	8%	7%	7%	5%	7%	7%	6%	8%	8%	7%
Openness factor	7%	6%	7%	7%	6%	6%	8%	7%	6%	5%	7%	6%	6%	8%	8%	7%

Glazing Type - Single 4mm Clear Glass

G-value / SHGC	38%	41%	40%	43%	49%	56%	66%	69%	65%	45%	52%	59%	66%	68%	69%	70%
Shading coefficient	44%	47%	46%	49%	56%	64%	76%	79%	75%	52%	60%	68%	76%	78%	79%	80%

Glazing Type - High Performance Glazing

G-value / SHGC	25%	26%	26%	26%	27%	28%	30%	31%	30%	27%	28%	29%	30%	30%	30%	31%
Shading coefficient	29%	30%	30%	30%	31%	32%	34%	36%	34%	31%	32%	33%	34%	34%	34%	36%

Colour Range

